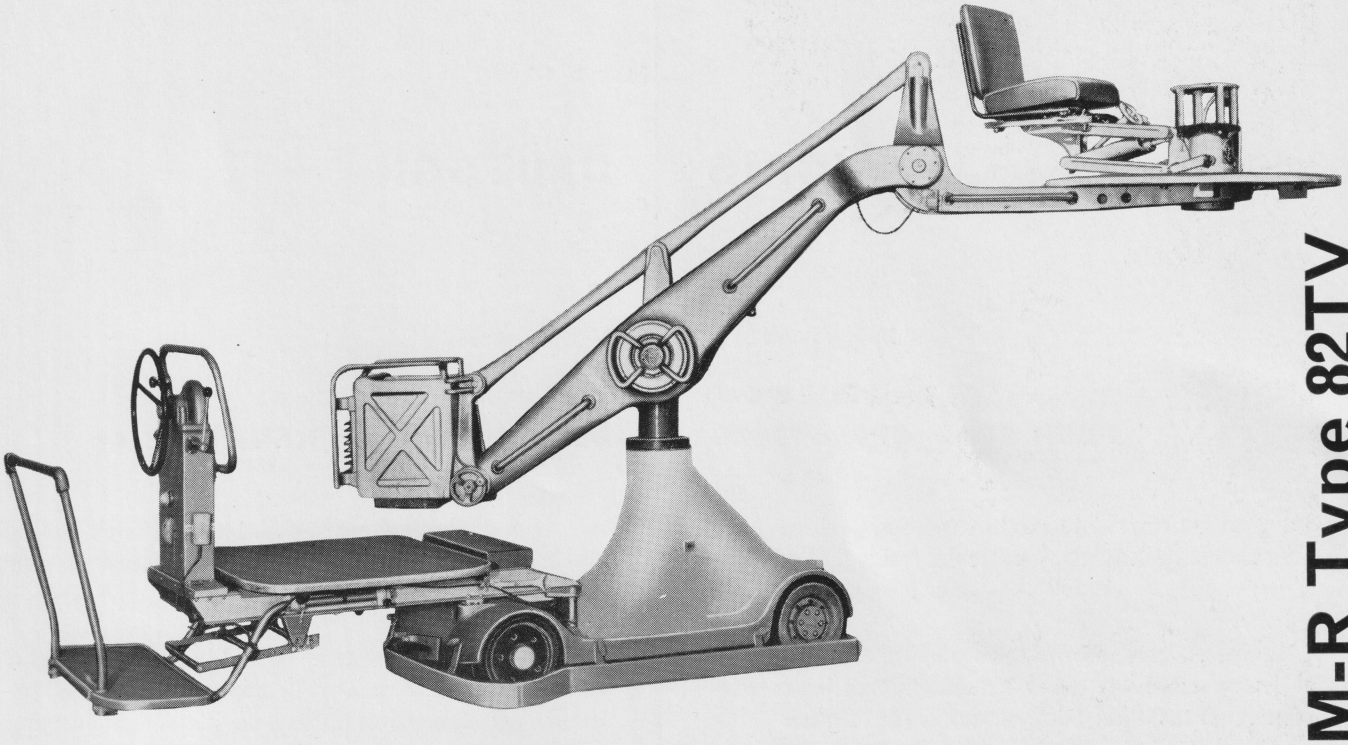

M-R Type 82TV
MOLE 3-MAN CAMERA CRANE

The crane is driven by a 5 H.P. 110 volt, D.C. motor.
Hydraulic brakes are fitted to the drive wheels.
The crew consists of three men; cameraman, jib operator and driver who controls crane movement and steering.
A special wheel suspension allows for floor depressions up to $\frac{1}{4}$ in. depth without affecting the stability of the crane.
Camera table can be raised to a maximum height of 9 ft. 1 in.
Jib can traverse on centre column full 360°.
Camera turret can also be rotated 360°.

ACCESSORIES

Lead Weights Floor Jacks Lifting Eyes

MOLE-RICHARDSON

MOLE 3-MAN CAMERA CRANE M-R Type 82TV